




RS-F100X

Top-of-the-line industrial-grade FR engine server for critical application.


Software	
Image Resolution (Min)	1080p (1920 x 1080 pixels)
Camera View Range (Metre)	10 metre
Face Pixel size (Min)	50 pixels
Lighting Illumination (Measurement)	800 lux
Vision based Face Detection	Yes
Face Recognition Results	Result record contains: <ul style="list-style-type: none"> • Face Detected coordinate • Face Recognition result based on (Top 5 closet to DB stored faces) • Time stamp
Number of Channel (Max)	10
Hardware	
Processor	Intel Processor
Memory (RAM)	16GB
Display Graphic	Discrete GPU
Storage	SATA RAID 1
Power Supply Voltage	600W
Environment Operation:	Operating: 10% to 85% (Max dew point temperature = 40°C) (noncondensing).
Connectivity Interfaces	TCP/IP, HTTP, UDP, USB
Processing Channel (Max)	10

FEATURES:

Deep Learning

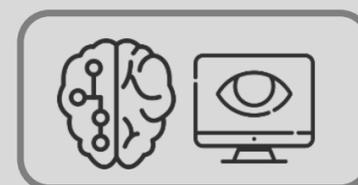

Post-event Forensic Search

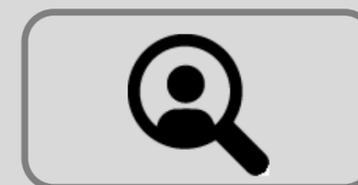

Real-Time Performance

